


Colours



yellow-black




red-white




neon-black



glow in the dark



yellow-black reflective



red-white reflective




black



white

Additional colours available on request.

Advantages

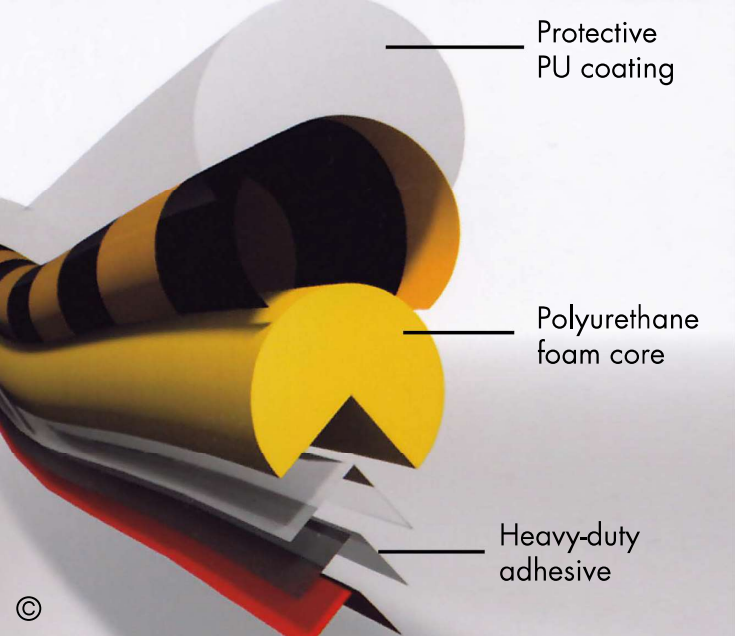

- Hazard warning and protection
- Minimisation of staff absence
- Reduction of damage-related costs
- Inside and outside usage
- Individual lengths up to 50 m
- Easy to install
- Budget-friendly fitting
- Robust and hard-wearing



Made in Germany



Knuffi®

Invisible Design

Knuffi®

Warning and Protective Bumper Guards



INFINITE SAFETY

We reserve the right to effect model changes or technical modifications.

Only Knuffi® offers Infinite Safety



Knuffi® warning and protective bumper guards are designed to protect humans and machines. A patented manufacturing process guarantees that the highly resilient polyurethane foam absorbs even the hardest of impacts. Our comprehensive product range covers surfaces, corners, edges and pipings. Available in various colours and with special product features Knuffi® can be used both indoors and outdoors. Whatever product you choose: You can always rely on highest quality Made in Germany.

Special product features

Various product types are also available with special features.



Knuffi® Frost: ideal for freezing conditions
Attachment at up to -10 °C.



Knuffi® Removable: reuse made easy
A reusable adhesive increases profitability and sustainability.



Knuffi® Magnetic: ideal for temporary solutions
The magnetic strip allows quick and easy mounting and removal.



Knuffi® Soft: The soft protection for hard cases
40% softer than the standard profile – with 100% safety.


Surface protection




Typ F



Typ D



Typ S



Typ C



Typ C+



Typ CC



Typ Giant

Edge protection



Typ B




Typ B+



Typ BB



Typ G




Typ W

Corner protection



Typ A



Typ A+




Typ AA




Typ E



Typ H



Typ H+



Typ Y



Typ H+ Flex

Piping protection



Typ R30



Typ R50

Guidance system



Oneway

Wall Protection Kit



WPK Typ F




WPK Typ S



WPK Typ C+



WPK Typ A



WPK Typ A+



WPK Typ E



WPK Typ H+

Technical data standard range

Adhesive: modified acrylic adhesive resistant to light and ageing on all types except B, BB and B+

Bonding strength: 21 N/25 mm

Temperature resistance: between -40 °C and +100 °C

Fire test: DIN EN 13501-1 / Class E

Standard lengths: 1 m, 5 m, up to 50 m (boxed)